


# BIPOLAR LINEAR INTEGRATED CIRCUIT SILICON MONOLITCHIC

## FOR FM/AM IF SYSTEM.

- . FM IF Amplifier
- . FM Quadrature Detector
- . AM Mixer
- . AM Local Oscillator
- . AM IF Amplifier
- . AM Detector
- . Signal Meter Driver
- . Low Supply Voltage Use :  $V_{CC}=3 \sim 8V$
- . Very Few External Parts.

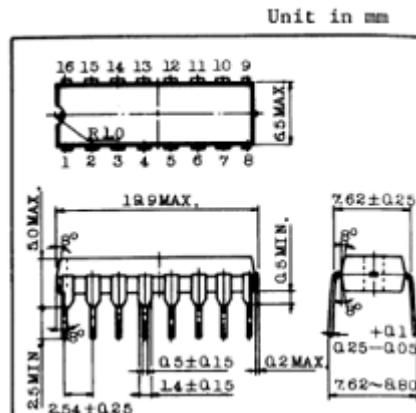

Lead pitch is 2.54 and tolerance is  $\pm 0.25$  against theoretical center of each lead that is obtained of the basis of No.1 and No.16 leads.

### MAXIMUM RATINGS ( $T_a=25^{\circ}\text{C}$ )

| CHARACTERISTIC           | SYMBOL    | RATING    | UNIT               |
|--------------------------|-----------|-----------|--------------------|
| Supply Voltage           | $V_{CC}$  | 8         | V                  |
| Power Dissipation (Note) | $P_D$     | 750       | mW                 |
| Operating Temperature    | $T_{opr}$ | -25 ~ 75  | $^{\circ}\text{C}$ |
| Storage Temperature      | $T_{stg}$ | -55 ~ 150 | $^{\circ}\text{C}$ |

Note : Derated above  $T_a=25^{\circ}\text{C}$  in the proportion of  $6\text{mW}/^{\circ}\text{C}$ .

### BLOCK DIAGRAM

