# Mini SERVO (ES08MD) SERIES

## SERVO ES08Md SPECIFICATIONS

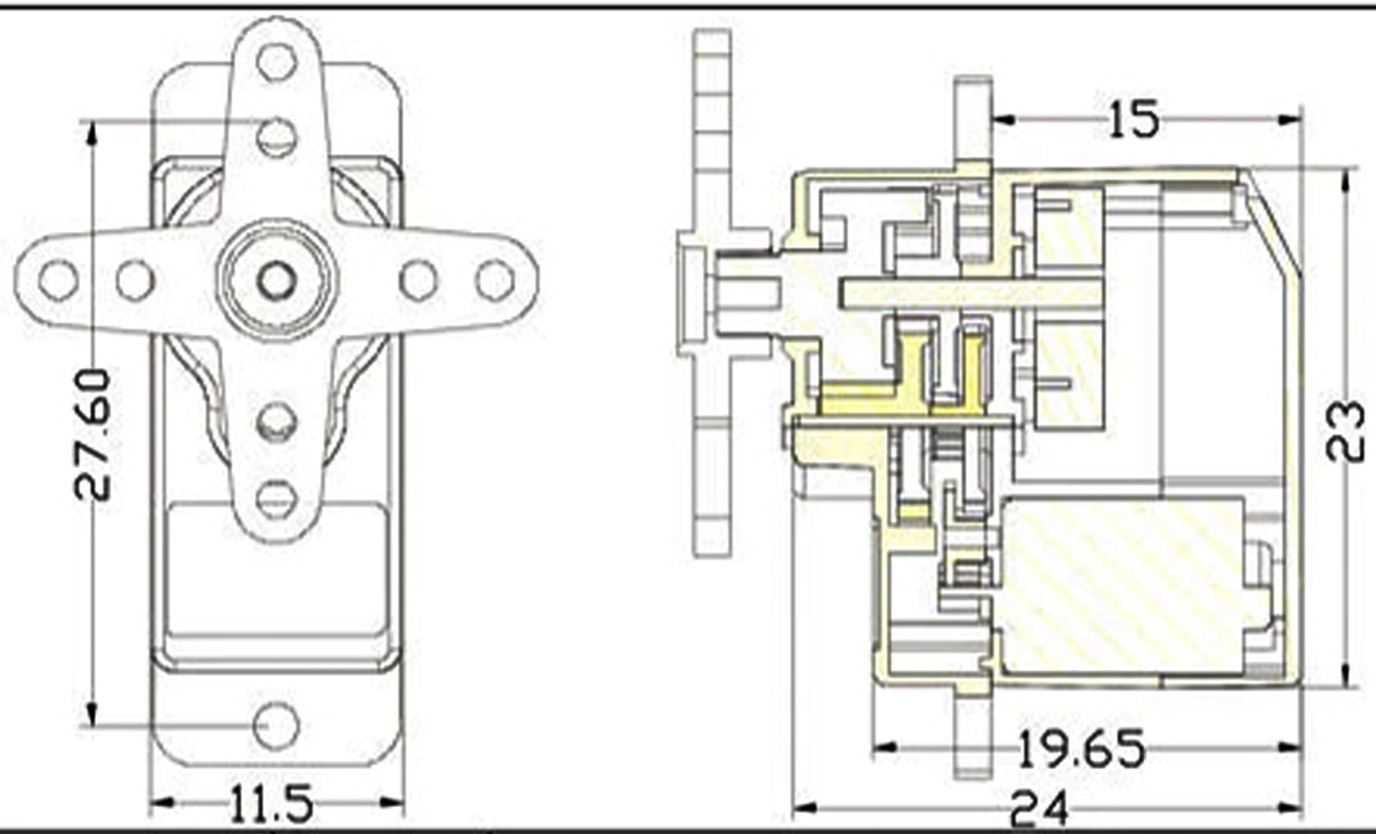


| | | |
|---|---|---|
| Operating Voltage: | | 4.8~6.0V |
| STD Direction: | | Counter Clockwise / Pulse Traveling 1500 to 1900usec |
| Stall Torque: | 4.8V | 1.6 Kgf.cm( 21.0 oz.in) |
| Operating Speed: | 4.8V | 0.12 Sec/60° at no load |
| Stall Torque: | 6.0V | 2.0 Kgf.cm( 28.0 oz.in) |
| Operating Speed: | 6.0V | 0.10 Sec/60° at no load |
| Size: | | 23X11.5X24 mm |
| Weight: | | 13 g |
| Plug Available | | FUT ;JR |
| Other | | Digital; Metal |