
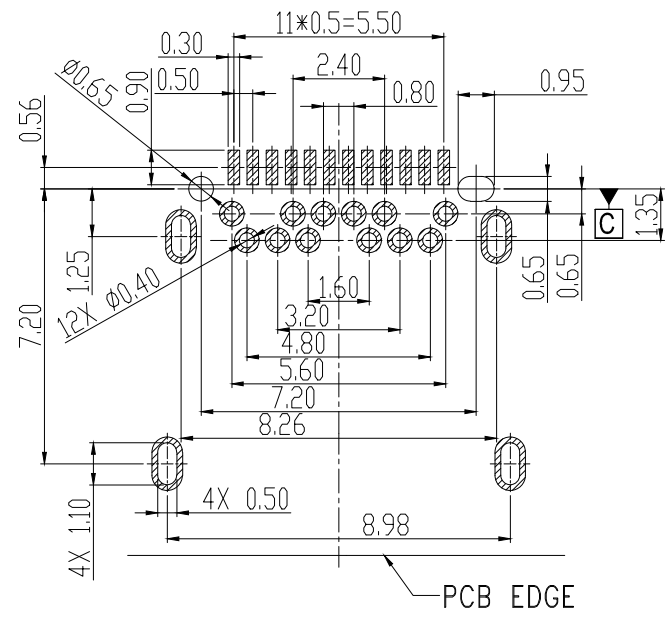
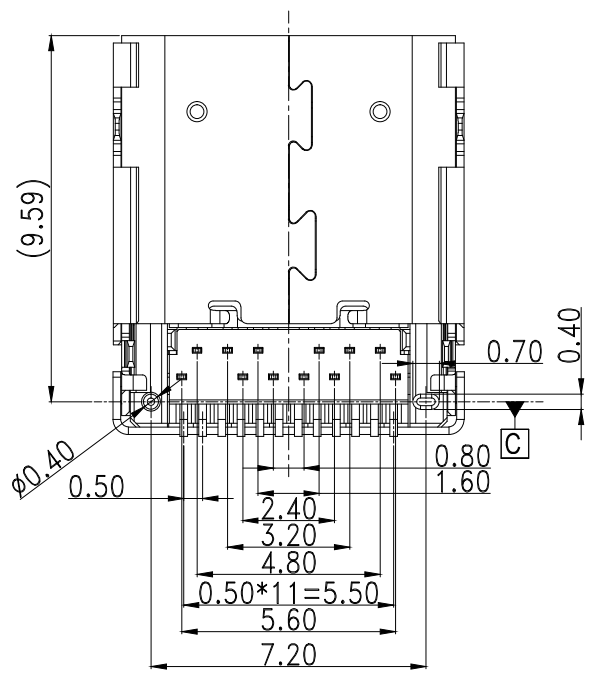
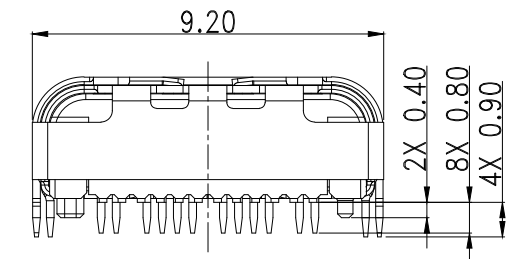
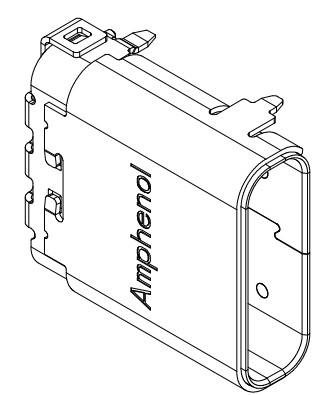
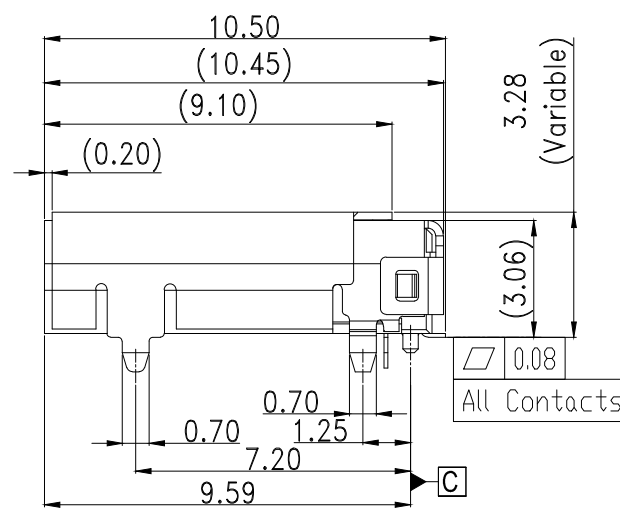


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
X1	1410****	NEW RELEASE	10/21/14	Tom
X2	1411****	MODIFY THE STRUCTURE	11/19/14	Tom
X3	1411****	MODIFY THE STRUCTURE	12/12/14	Tom
X4	1412****	MODIFY THE STRUCTURE	12/26/14	Tom

REFERENCE DRAWING

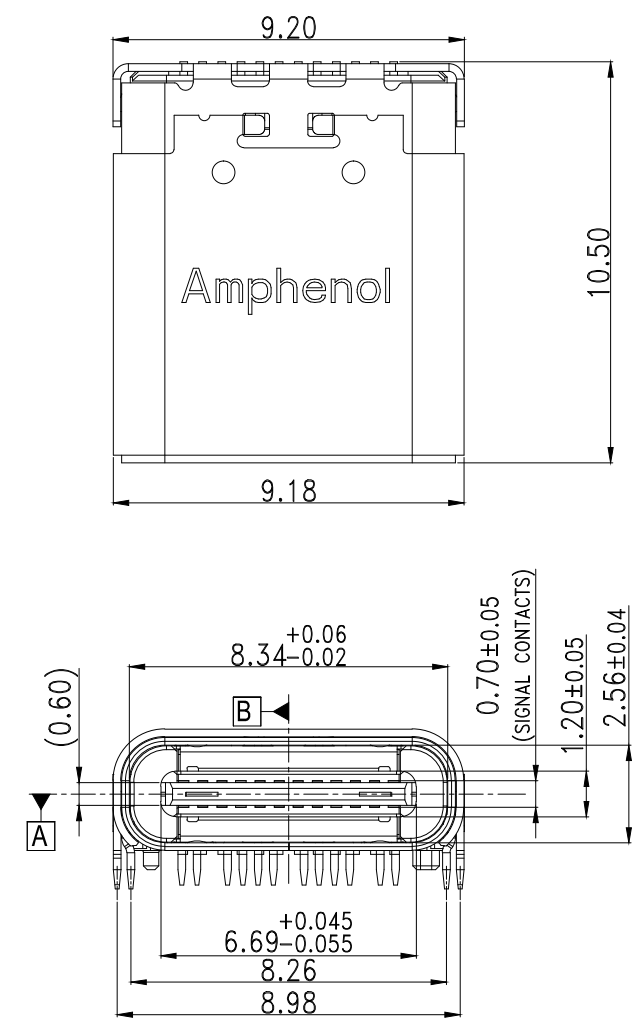

RECOMMENDED PCB LAYOUT
(Tolerance=±0.05)

- Notes:
- Material :
Contacts : copper alloy
Shell : SUS
Housing : High-temperature polymer UL94V-0, black.
 - Plating :
Contacts : contact area 30u" Au, solder tail 100u" Matte Tin, all area 50u" Nickel plating.
Shell : Nickel Plating
 - Coplanarity : 0.08Max.
 - P/N : C12401548E4#2A.
 - Packaging type: carrier tape.
 - Material should be fulfilled Amphenol spec# SSN002 AND Customer Requirements, for halogen free products, also need to meet SSN004

UNLESS OTHERWISE SPECIFIED TOLERANCES U.S. METRIC .X +/- ±0.30 .XX +/- ±0.25 .XXX +/- ±0.20 FRACTIONS +/- ANGLES +/-	APPROVAL	DATE	<h2 style="text-align: center;">Amphenol</h2>		
	DRAWN Michael.qin	12/26/14			
	CHECKED Weison.Lu	12/26/14	TITLE USB TYPE C CONNECTOR RIGHT ANGLE HYBRID		
	CHECKED				
FOR MATERIALS AND FINISHES SEE NOTES	DRAWING FILE :		SIZE	DRAWING NO.	REV.
REMOVE SHARP EDGES	ANGLE OF PROJECTION		A3	C12401548E4#2A	X4
DIMENSIONS			SCALE	NONE	SHEET 1 OF 1
U.S. INCHES					
(METRIC) (MM)					