


Specification

Nominal Voltage	6V	
Nomial Capacity (20HR)	3.2AH	
Dimension	Length	66 ± 1mm (2.60 inches)
	Width	33 ± 1mm (1.30 inches)
	Container Height	97 ± 1mm (3.82 inches)
	Total Height (with Terminal)	103 ± 1mm (4.06 inches)
Approx Weight	Approx 0.57 kg (1.26lbs)	
Terminal	T1	
Container Material	ABS	
Rated Capacity	2.80 AH/0.14A	(20hr ,1.80V/cell,25 °C/77 °F)
	2.60 AH/0.26A	(10hr,1.80V/cell,25 °C/77 °F)
	2.40 AH/0.48A	(5hr,1.75V/cell,25 °C/77 °F)
	2.13 AH/0.71A	(3hr,1.75V/cell,25 °C/77 °F)
	1.76 AH/1.76A	(1hr,1.60V/cell,25 °C/77 °F)
Max. Dis charge C urrent	42A (5s)	
Internal Re sistance	Approx 30m Ω	
Operating Temp.Ra nge	Discharge : -15 ~ 50°C (5 ~ 122°F)	
	Charge : 0 ~ 40°C (32 ~ 104°F)	
	Storage : -15 ~ 40°C (5 ~ 104°F)	
Nominal Operating Temp. R ange	25 ± 3°C (77 ± 5°F)	
Cycle Use	Initial Charging C urrent less than 0.84A.Voltage 7.2V~7.5V at 25°C (77°F)Temp. C oefficient -15mV/°C	
	No limit on Initial C harging C urrent Voltage 6.75V~6.9V at 25°C (77°F)Temp. C oefficient -10mV/°C	
Standby Use		
Capacity affected by Temperature	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	Leoch LP series batteries may be stored for up to 6 months at 25°C(7 7°F) and then a freshe ning charge is required. For higher temperatures the time interval will be s shorter.	



Applications

- ♦ All purpose
- ♦ Uninterruptable Power Supply(UPS)
- ♦ Electric Power System(EPS)
- ♦ Emergency backup power supply
- ♦ Emergency light
- ♦ Railway signal
- ♦ Aircraft signal
- ♦ Alarm and security system
- ♦ Electronic apparatus and equipment
- ♦ Communication power supply
- ♦ DC power supply
- ♦ Auto control system

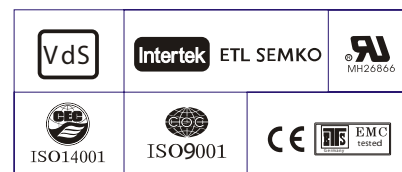

Constant Current Discharge (Amperes) at 25 °C (77 °F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	5.33	4.09	3.39	2.93	2.27	1.67	1.41	0.83	0.65	0.53	0.432	0.375	0.302	0.253	0.139
1.80V/cell	7.16	5.23	4.10	3.47	2.68	1.94	1.58	0.91	0.70	0.57	0.464	0.402	0.321	0.260	0.140
1.75V/cell	8.07	5.75	4.48	3.73	2.78	2.02	1.65	0.94	0.71	0.58	0.476	0.413	0.326	0.267	0.141
1.70V/cell	8.89	6.27	4.78	3.92	2.89	2.10	1.70	0.97	0.73	0.59	0.488	0.422	0.331	0.273	0.144
1.65V/cell	9.80	6.76	5.08	4.16	3.05	2.15	1.74	0.98	0.77	0.61	0.501	0.431	0.336	0.278	0.146
1.60V/cell	10.81	7.34	5.43	4.44	3.22	2.24	1.76	1.02	0.79	0.63	0.518	0.440	0.339	0.281	0.147




Constant Power Discharge (Watts) at 25 °C (77 °F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	9.75	7.56	6.33	5.53	4.32	3.21	2.72	1.62	1.27	1.04	0.847	0.737	0.597	0.500	0.275
1.80V/cell	12.9	9.55	7.54	6.44	5.02	3.71	3.03	1.75	1.36	1.10	0.905	0.787	0.631	0.515	0.277
1.75V/cell	14.3	10.3	8.14	6.86	5.17	3.81	3.15	1.81	1.38	1.12	0.926	0.806	0.641	0.528	0.279
1.70V/cell	15.3	11.0	8.57	7.16	5.35	3.95	3.24	1.85	1.41	1.15	0.948	0.822	0.649	0.538	0.284
1.65V/cell	16.6	11.8	9.04	7.54	5.60	4.01	3.29	1.87	1.47	1.18	0.970	0.837	0.658	0.548	0.288
1.60V/cell	17.9	12.5	9.51	7.95	5.87	4.16	3.31	1.94	1.51	1.22	0.999	0.853	0.663	0.553	0.289


Dimensions

T1 Terminal


Unit: mm [inches]

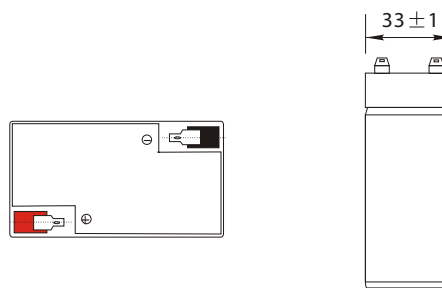


Discharge Characteristics

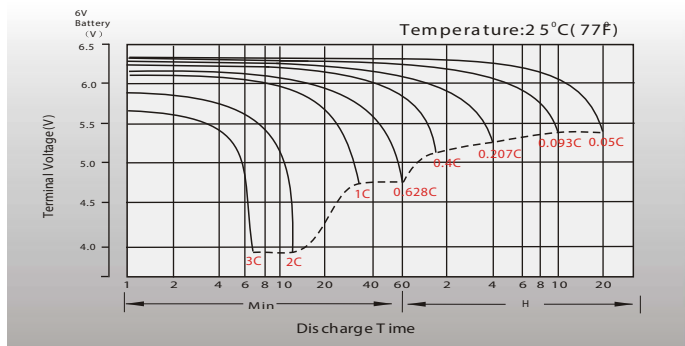


Float Charging Characteristics

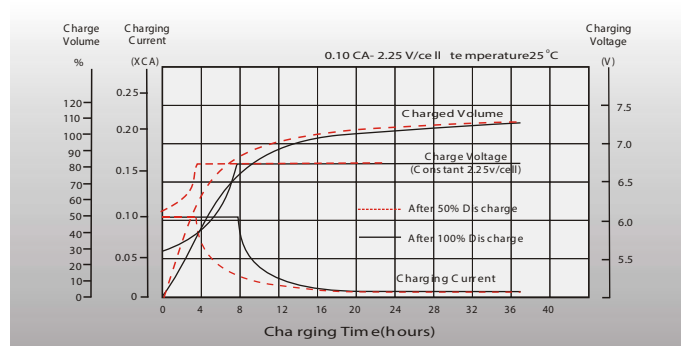


Temperature Effects in Relation to Battery Capacity

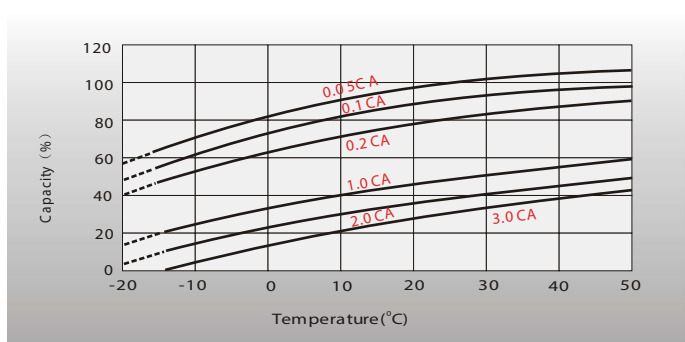


Effect of Temperature on Long Term Float Life

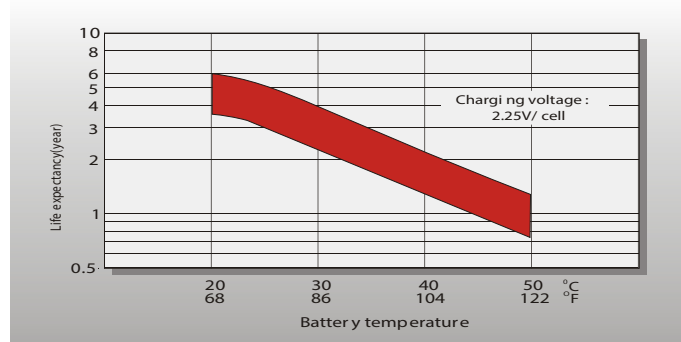

Cycle Life in Relation to Depth of Discharge

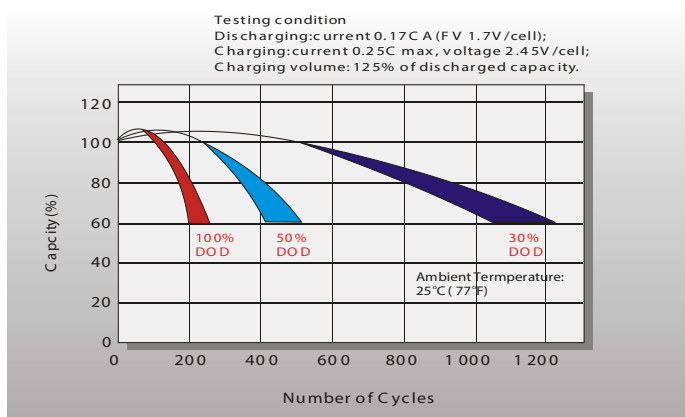

Self Discharge Characteristics

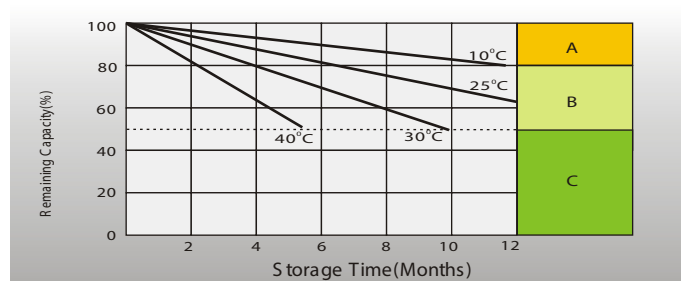

- A** No supplementary charging required (Carry out supplementary charging before use if 100% capacity is required.)
- B** Supplementary charging required before use. Optional charging ways as below:
1. Charged for a above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
2. Charged for a above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.
3. Charged for 8 ~10 hours at limited current 0.05 CA.
- C** Supplementary charging may often fail to recover the capacity. The battery should never be left standing still in a storage.