

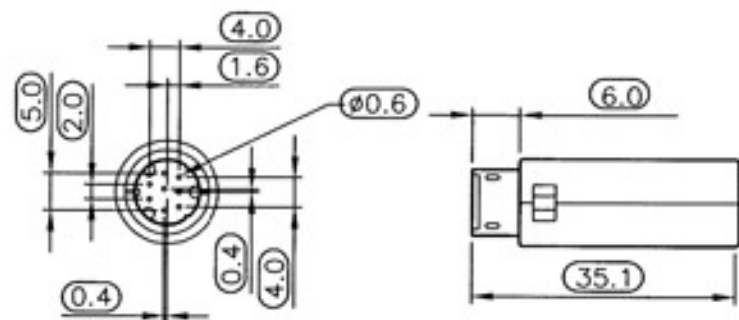


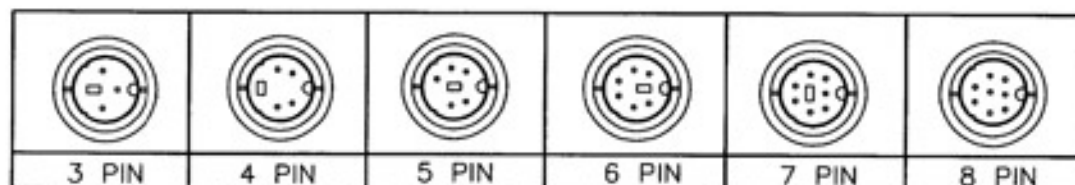

ASSEMBLY TYPE MALE

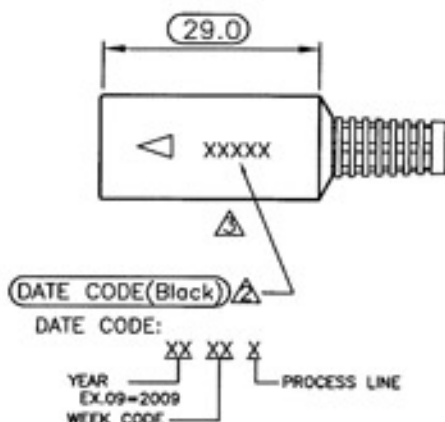

SPECIFICATION

MATERIAL

Insulator: PBT, rated UL94V-0

Contacts: Brass

Shell: Brass

FINISHES

Shell: Nickel plated

CONTACT PLATING

Underplate: 50u" Nickel

Contact area: 1u"~30u" Selective Gold

Solder tails area: 100u" Tin(Lead Free)

ELECTRICAL

Current rating: 1Amps max.

Contact resistance: 30 milliohm max.

Insulation resistance: 500 megohm min. at 500V DC

Dielectric withstanding voltage: 500V AC at 1 minute

Temperature Range: -55°C to +105°C

Part no.

601 A E XX M X B A D Q X
1 2 3 4 5 6 7 8 9 10 11

1.SERIES NO.

2.TYPE: A=Standard

3.GREEN OPTION:

E=RoHS

4.CONTACT NUMBER:

03~08

5.CONTACT TYPE:

M=Male

6.CONTACT PLATING:

T=Tin Plated

G=Gold Flash

S=Gold Flash (Selective)

A=5u" Gold (Selective)

B=10u" Gold (Selective)

C=15u" Gold (Selective)

D=30u" Gold (Selective)

7.ROW TYPE:

B=Assembly

8.PROCESS OPTION:

A=Sleeve W/O hole

9.FILL IT WITH "0"

10.FILL IT WITH "0"

11.INSULATOR COLOR:

3=Black

△C=Black+Date Code(Black)

DE001867

MD08PZ

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±5°
0.	±0.5
.0	±0.3
.00	±0.2
SCALE: AS SHOWN	UNIT: mm

SWISS
DELTRON
CONNECT 2 CUSTOMIZE

E	ECN-0908022(Chichi) △(6,E)	08/05/09	DRAWN	PEARL	08/05/09	DRAWN NAME:	MINI DIN SOLDER TYPE(M)
D	ECN-0907224(Chichi) △(6,E)(7,B)	07/29/09	CHECKED	Pearl	08/05/09	PRODUCT NO.	601AEXXMXBA00X
C	ECN-0608177(Lillian) △(7,E)	08/24/06	APPROVED	ne	08/05/09	FILE NAME:	601AEXXMXBA00C(82)
REV.	DESCRIPTION	DATE	SIZE	REV.	FILE NAME		
			A4	E			