

# D-Sub Gender Changer

9P, Male / Male








## SPECIFICATION:


Poles	9
Insulator	PBT, UL 94 V-0
Gender of contacts	Male / Male
Connection A	D-SUB 9-Pin Male
Connection B	D-SUB 9-Pin Male
Housing material	Steel
Temperature range	-55...+105 °C
Rated current	3 A
Contact material	Brass, gold-plated
Dielectric withstand voltage	AC 1000 V RMS
Insulation resistance	1000 M $\Omega$ min. at DC 500 V
Contact resistance	25 m $\Omega$ max.

**Art. Nr.**

**RND 205-00852**

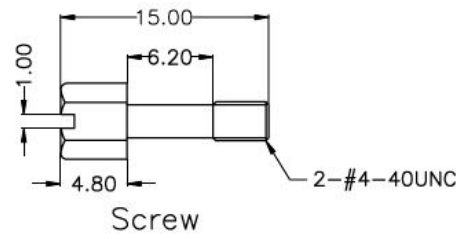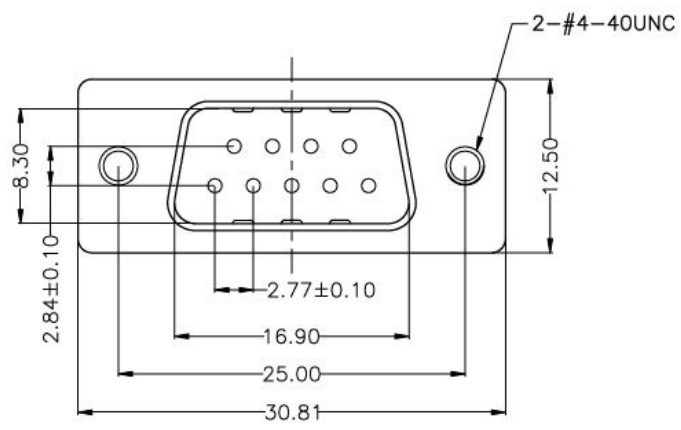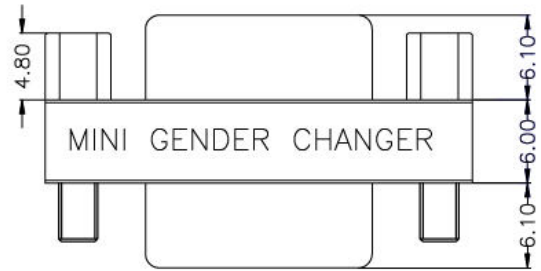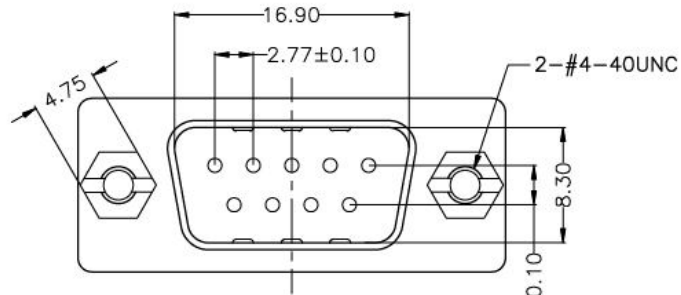

DGC 09M/M GENDER CHANGER  
 PIN OUT: 9Male 9Male



Label: Yellow Color With Black Character.  
 One Side: MINI GENDER CHANGER.  
 The Other Side: U.S.A PATENT 5199906