

# FILTER FAN PLUS

FPI/FPO 018 | up to 24m<sup>3</sup>/h (92 x 92mm)



- > New air-flap outlet technology for high airflow
- > Easy mounting
- > Protection type test/Environmental rating by independent testing institutes (VDE and UL)
- > Two systems for optimal airflow (FPI/FPO)
- > Standard enclosure cut-out sizes (5 sizes)
- > One filter mat

Filter fans are used to provide an optimum climate in enclosures and cabinets with electrical/electronic components. The interior temperature of an enclosure can be reduced by channelling cooler filtered outside air into the enclosure thus expelling heated internal air. The resulting airflow prevents formation of localised hot pockets in installations and protects electronic components from overheating.

The Filter Fan Plus series uses a new air-flap outlet technology for the air outlet and thus reaches a high degree of airflow. A ratchet mechanism is used for mounting and provides high stability and tightness. Depending on the application there are two systems that are available – the FPI or FPO system. The FPI system is a standard installation with a filter fan in the lower part of the enclosure which ensures that fresh air is fed into the enclosure (airflow direction "In"). This system consists of a filter fan and exit filter. Whereas in the FPO system, the filter fan is located in the upper area of the enclosure to avoid heat buildups (airflow direction "Out"). The FPO system is composed of an intake filter and exit filter fan. The Filter Fan Plus series has been designed for indoor use.




## TECHNICAL DATA

<b>Axial fan, ball bearing</b>	service life L10 at +40°C (+104°F): min. 50,000h fan body aluminium, rotor metal
<b>Connection</b>	2 stranded wires, 300mm
<b>Casing, hood, flaps</b>	plastic according to UL94 V-0, light grey; UV light resistant according to UL746C (f1)
<b>Enclosure cut-out</b>	92 x 92 <sup>1</sup> mm
<b>Mounting frame</b>	4 built-in ratchet braces for mounting (6 notches for wall thickness 1 – 4mm). Additional use of screws possible if needed <sup>1</sup> .
<b>Filter mat</b>	G3 acc. to DIN EN 779, average arrestance A <sub>s</sub> 84%
<b>Filter material</b>	synthetic fibre with progressive construction, temperature resistant to +100°C, self-extinguishing class F1, moisture resistant to 100% RH, reusable
<b>Operating/Storage temperature</b>	-40 to +70°C (-40 to +158°F)
<b>Operating/Storage humidity</b>	max. 90% RH (non-condensing)
<b>Protection type/Protection class</b>	IP54 / I (earthed)
<b>Environmental rating UL/NEMA</b>	UL TYPE 12 / NEMA 12
<b>Approvals</b>	VDE, UL File No. E234324, EAC
<b>Note</b>	other voltages on request

<sup>1</sup> Drilling marks for screw mounting are indicated on mounting frame.

## SYSTEM FPI

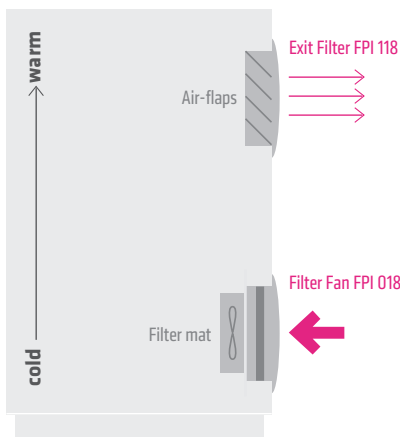


### AIRFLOW DIRECTION "IN": FILTER FAN FPI 018

Art. No.	Operating voltage	Air volume, free flow	Air volume with exit filter	Current consumption (50/60 Hz)	Power consumption	Average noise level (DIN EN ISO 4871)	Depth in enclosure	Weight (approx.)	Filter mat
01870.0-30	AC 230V, 50/60Hz	19m <sup>3</sup> /h	13m <sup>3</sup> /h	70mA	12W	39dB	66mm	0.6kg	G3
01870.9-30	AC 115V, 50/60Hz	23m <sup>3</sup> /h	16m <sup>3</sup> /h	115mA	11W	43dB	66mm	0.6kg	G3

### AIRFLOW DIRECTION "IN": EXIT FILTER FPI 118

Art. No.	Depth in enclosure	Weight (approx.)	Air outlet
11870.0-00	29mm	0.2kg	air-flap outlet technology

# SYSTEM FPO

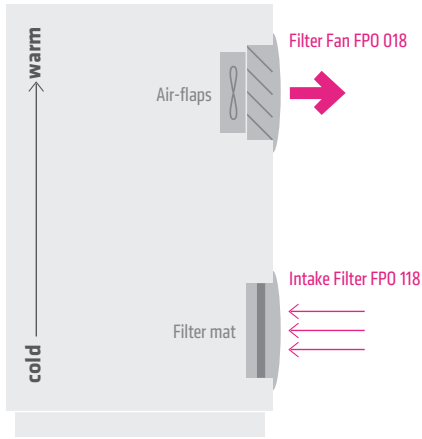

## AIRFLOW DIRECTION "OUT": FILTER FAN FPO 018

Art. No.	Operating voltage	Air volume, free flow	Air volume with intake filter	Current consumption (50/60Hz)	Power consumption	Average noise level (DIN EN ISO 4871)	Depth in enclosure	Weight (approx.)	Air outlet
01880.0-00	AC 230V, 50/60Hz	24m <sup>3</sup> /h	15m <sup>3</sup> /h	70mA	12W	38dB	72mm	0.6kg	air-flaps
01880.9-00	AC 115 V, 50/60 Hz	32 m <sup>3</sup> /h	19 m <sup>3</sup> /h	115 mA	12 W	41 dB	72 mm	0.6 kg	air-flaps

## AIRFLOW DIRECTION "OUT": INTAKE FILTER FPO 118

Art. No.	Depth in enclosure	Weight (approx.)	Filter mat
11880.0-30	22mm	0.2kg	G3 acc. to DIN EN 779, average arrestance A <sub>s</sub> 84%

## FILTER MAT FM 086

Filter class	84 x 84mm	Average arrestance A <sub>s</sub>	1 packing unit
G3 acc. to DIN EN 779	Art. No. 08633.0-00	84%	5 pieces

## TECHNICAL DRAWINGS

