

Model		LW26-20			LW26-25			LW26-32		
Rated insulation voltage Ui		690V			690V			690V		
Rated thermal current Ith		20A			25A			32A		
Rated working voltage Ue(V)		120	240	440	120	240	440	120	240	440
Rated working current Ie	AC-21A AC-22A	-	20	20	-	25	25	-	32	32
	AC-23A	-	15	15	-	22	22	-	30	30
	AC-2	-	15	15	-	22	22	-	30	30
	AC-3	-	11	11	-	15	15	-	22	22
	AC-4	-	3.5	3.5	-	6.5	6.5	-	11	11
	AC-15	-	5	4	-	8	5	-	14	6
	DC-13	5	1	-	9	1.5	-	25	11	-
Power P (KW)	AC-23A	-	3.7/2.5	7.5/3.7	-	5.5/3	11/5.5	-	7.5/4	15/10
	AC-2	-	4	7.5	-	5.5	11	-	7.5	18.5
	AC-3	-	3/2.2	5.5/3	-	4/3	7.5/7	-	5.5/4	11/6
	AC-4	-	0.55/0.75	1.5/1.5	-	1.5/1.5	3/2.2	-	2.7/1.5	5.5/2.4

Model		LW26-63		LW26-125		LW26-160	
Rated insulation voltage Ui		690V		690V		690V	
Rated thermal current Ith		63A		125A		160A	
Rated working voltage Ue(V)		240	440	240	440	240	440
Rated working current Ie	AC-21A AC-22A	63	63	100	100	150	150
	AC-23A	57	57	90	90	135	135
	AC-2	57	57	90	90	135	135
	AC-3	36	36	75	75	95	95
	AC-4	15	15	30	30	55	55
	AC-15	-	-	-	-	-	-
	DC-13	-	-	-	-	-	-
Power P (KW)	AC-23A	15/10	30/18.5	30/15	45/22	37/22	75/37
	AC-2	18.5	30	30	45	37	55
	AC-3	11/6	18.5/11	18.5/11	30/13	22/11	37/18.5
	AC-4	5.5/2.4	7.5/4	7.5/4	12/5.5	10/4	15/7.5


LW26GS



LW-26

Amp:10/20/25/32/63/125/160/250/315A



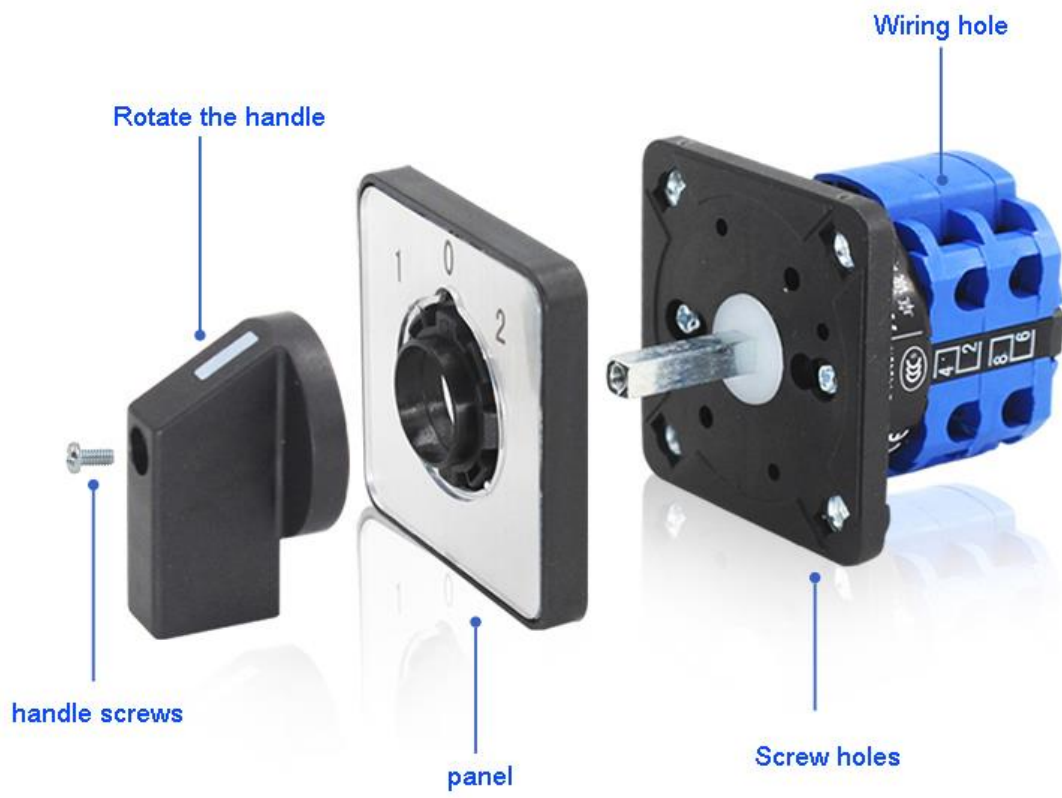



PC Material, Strong Flame Retardant



## LW26-10 (10A)



1 pole



2 pole



3 pole



4 pole

## LW26-20 (20A)



1 pole



2 pole



3 pole



4 pole