

Features


- Patch cable for networking connections between device
- Prepared unshielded Twisted Pair cable with RJ-45 connectors on both ends
- Durable due to moulded kink protection
- Flexible cable, suitable for narrow bending
- Plugs with gold plated contacts
- Contact settings 1:1, in accordance with the EIA/TIA 568 standard
- Construction: 4-pair stranded wire



Specification

Shielding	UTP
Colour	Grey
Impedance	100 Ohm
Conductor Type	Wire
Ethernet Connector A	RJ45 Plug
Ethernet Connector B	RJ45 Plug
Cable Type	CAT6
Contact Setting	1:1

Drawing

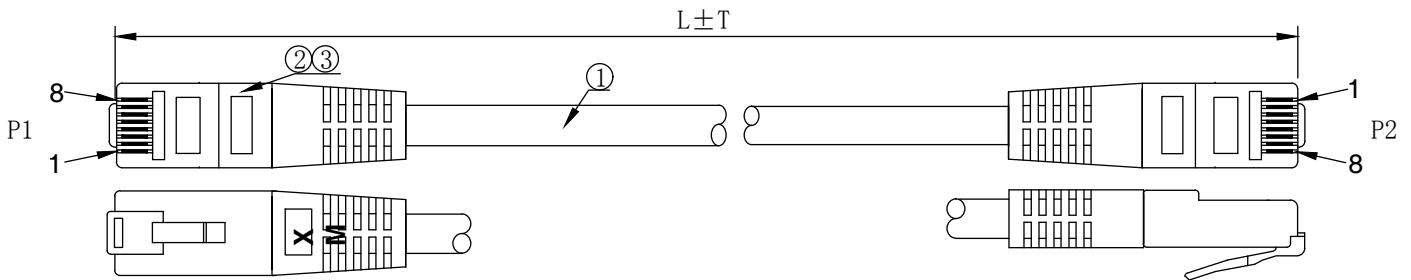

MATERIAL LIST

NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y
③	OVER MOLD	ht# # \ Q y k 8	2
②	CONNECTOR	KK ` h # yVo=@Q -) h@ 8 \ Q hO u-) ` ` # \ Q k uk` Vch` k - Vu	2
①	CABLE	yuh#` u ` ` † 8 ##` h` @o dM` K #Muht# 8 \)	1

Item No.	Colour	Length
RND 765-002	8	500 mm
RND 765-002	8	1 m
RND 765-002	8	1.5 m
RND 765-0024	8	2 m
RND 765-0024	8	3 m
RND 765-0024	8	5 m
RND 765-002	8	10 m

