



STRUCTURE

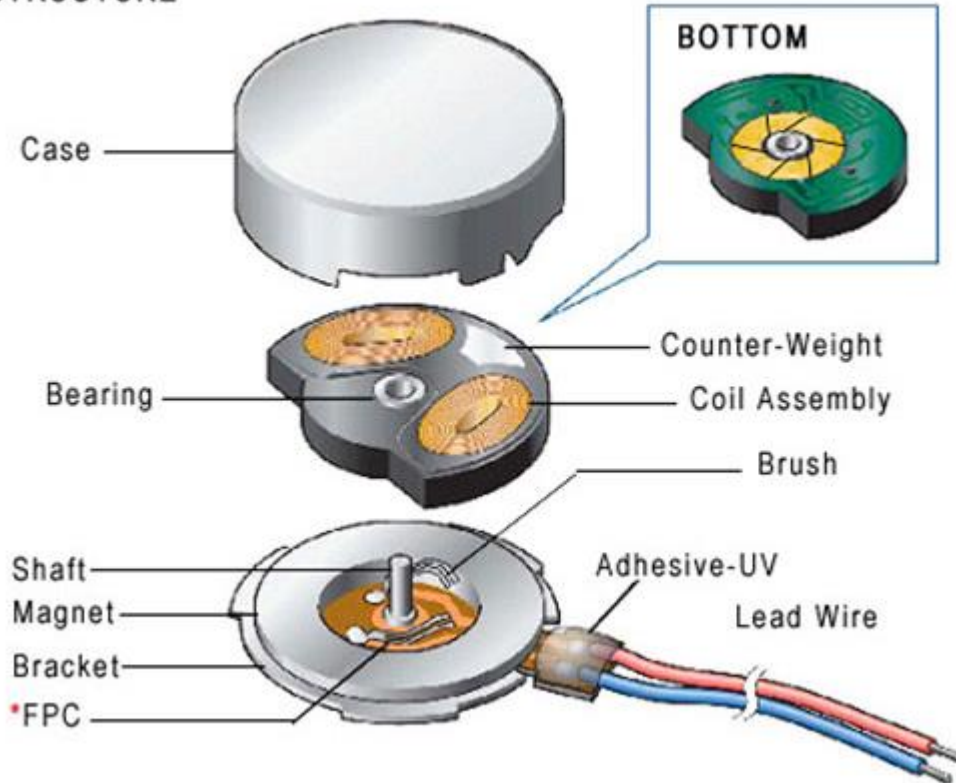

LX10*2.7L

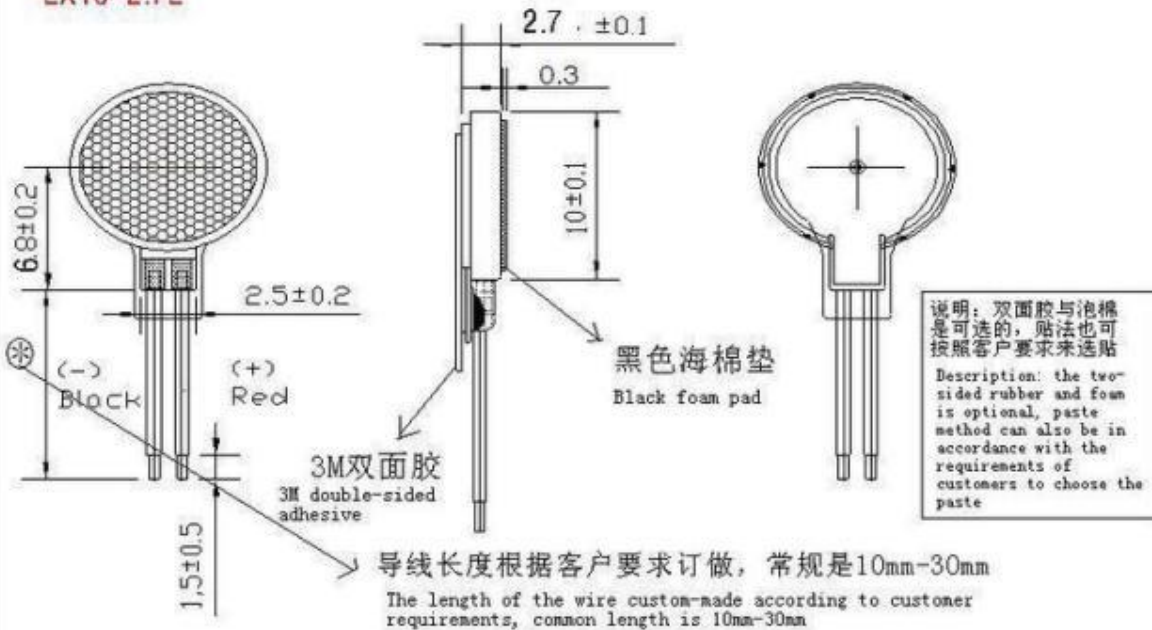

Reference to technical parameters:

Rated Voltage	3.0 VDC
Operating Voltage Range	2.5 to 4.0 VDC
Direction of Rotation	Any Direction
Operating Temperature	-20 to +60 Deg C
Storage Temperature	-30 to +70 Deg C
Rated Speed	12000 +/- 2500 RPM
Rated Current	70mA max
Starting Current	90mA max
Starting Voltage	2.3 VDC max
Insulation Resistance	10M Ohm min
Terminal Impedance	30 Ohms +/-15% (Single Phase) 60 Ohms +/-15% (Two Phase)