



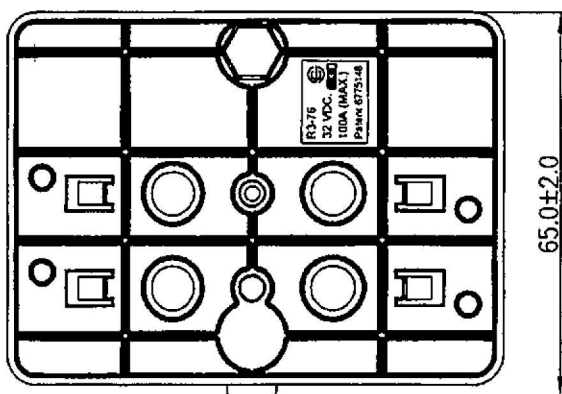
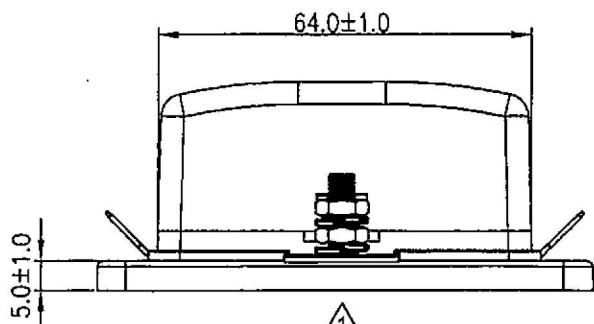


Voltage (Max.)	32 VDC.	Mounting Holes	Blade Fuse Dim.
Input Terminal Rating	#10-32 threaded studs (100A max.)		
Output Terminal Rating	30A max. per circuit.		
Connection Pad Option Available	Input wire size : #4-6 AWG. Output wire size : #12-16 AWG.	Terminal Dim.	
Fuse Specifications	For Blade Fuses Used Only		
Torque Rating	20 in-lb (2.25Nm) max.		
Mounting Torque Rating	8 in-lb (0.9Nm) max.		
Temperature Rating	-20 °C to 85 °C	Circuit Diagram	

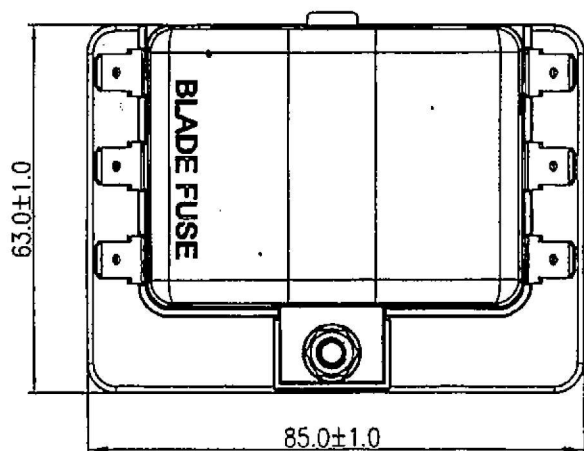

#10-32UNF
Torque: 20 in-lb

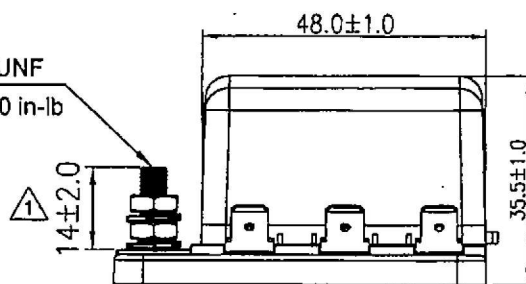

Material :

Cover : PC. (Transparent)
Housing , Base : PBT. (Black)
Push Button : POM. (White)
Terminal : Tin. plating Copper

Notes :

1. Rating 100A max. tested by
4 pcs. 25A. load.

03/18/'16	柳新強	設計變更,取消平墊圈,增加1PCS彈簧華司/1PCS六角螺母/1PCS 3M貼紙,尺寸15±2.0變更為14±2.0,更新圖面				△
Date	Name	Description				No.
Drawn	Checked	Approved	SCI BOM No.	1310541	Model Name	BLADE FUSE BOX (6P)
柳新強	3/23-'16	Simon	Customer No.	11514-06T	Model No.	R3-76-01-3L106
03/18/'16	3/23-'16	3/23-'16	Unit	mm	Rev. 1	