





15EDGK-3.5
15EDGK-3.81

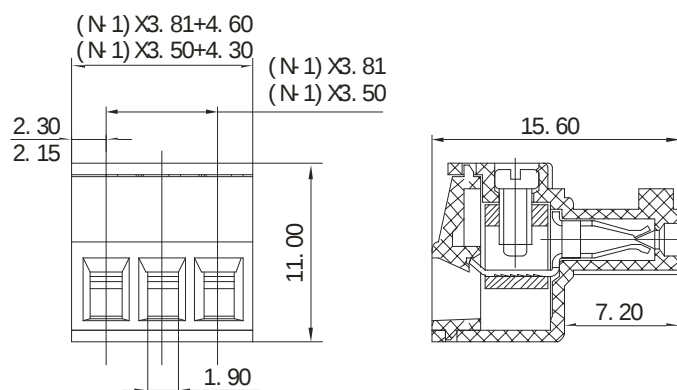

A 向视图

APPROVAL

Electrical

Standard

Rated voltage

Rated current

Wire range

Withstanding voltage



UL

IEC

300V

250V

8A

7A

28-16AWG

0.5-1.5mm²

AC2000V/1Min

Mechanical

Torque

0.2Nm(1.7Lb-In)

Ambient temperature

-40°C~+105°C

Strip length

7mm

Dimensions

Pitch

3.5mm(.138") 3.81mm(.150")

Poles

2P-24P

Material

Housing

PA66,UL94V-0

Screws

M2,Steel,Cr³⁺Zn-plated



Contact

Phosphor bronze

Cage

Brass,Ni-plated

HOW TO ORDER :

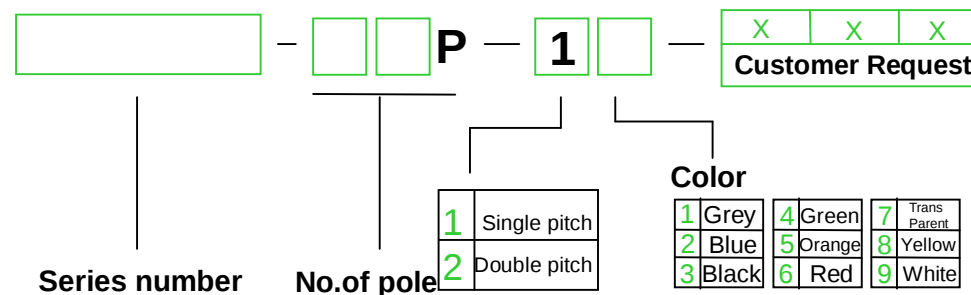

DEGSON ELECTRONICS CO., LTD.

NAME

15EDGK-3.5, 15EDGK-3.81

Manufacturer	DEGSON ELECTRONICS
Type of connector	pluggable terminal block
Connector	plug
Kind	female
Spatial orientation	straight
Electrical mounting	cage clamp, screw terminal
Mechanical mounting	for cable
Locking system	friction lock
Rated voltage	250V
Current rating	7A
Contact material	phosphor bronze
Body material	polyamide 66
Flammability rating	UL94V-0
Wire cross-section	0.5...1.5mm ²
Operating temperature	-40...105°C
Conform to	CE UL VDE
Wire size	28AWG...16AWG