

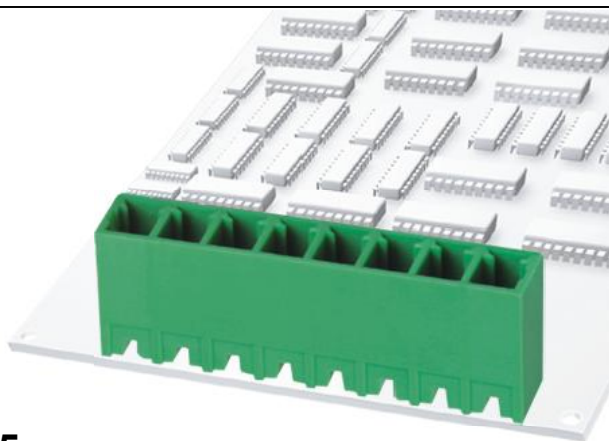






15EDGVC-3.5
15EDGVC-3.81

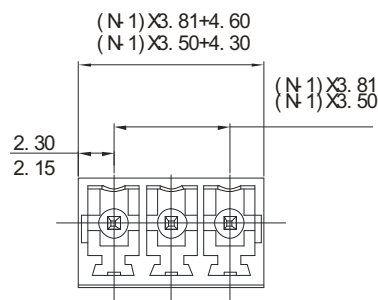

APPROVAL

Electrical

Standard

Rated voltage

Rated current

Withstanding voltage

Mechanical

Ambient temperature

Dimensions

Pitch

Poles

Material

Housing

Pin header



UL

IEC

300V

250V

8A

7A

AC2000V/1Min

-40℃~+105℃

3.5mm(.138") 3.81mm(.150")

2P-24P

PA66,UL94V-0

Brass,Tin-plated

HOW TO ORDER :

- P - -

X	X	X
Customer Request		



Series number

No.of pole

1	Single pitch
2	Double pitch

Color

1	Grey	4	Green	7	Trans Parent
2	Blue	5	Orange	8	Yellow
3	Black	6	Red	9	White



DEGSON ELECTRONICS CO., LTD.

NAME

15EDGVC-3.5, 15EDGVC-3.81

Manufacturer	DEGSON ELECTRONICS
Type of connector	pluggable terminal block
Connector	socket
Kind	male
Spatial orientation	straight
Electrical mounting	THT
Mechanical mounting	on PCBs
Locking system	friction lock
Rated voltage	250V
Current rating	7A
Contact material	brass
Contact plating	tinned
Body material	polyamide 66
Colour	green
Flammability rating	UL94V-0
Operating temperature	-40...105°C
Conform to	CE UL VDE