




1-1. HOUSING & CONTACT ASSEMBLY

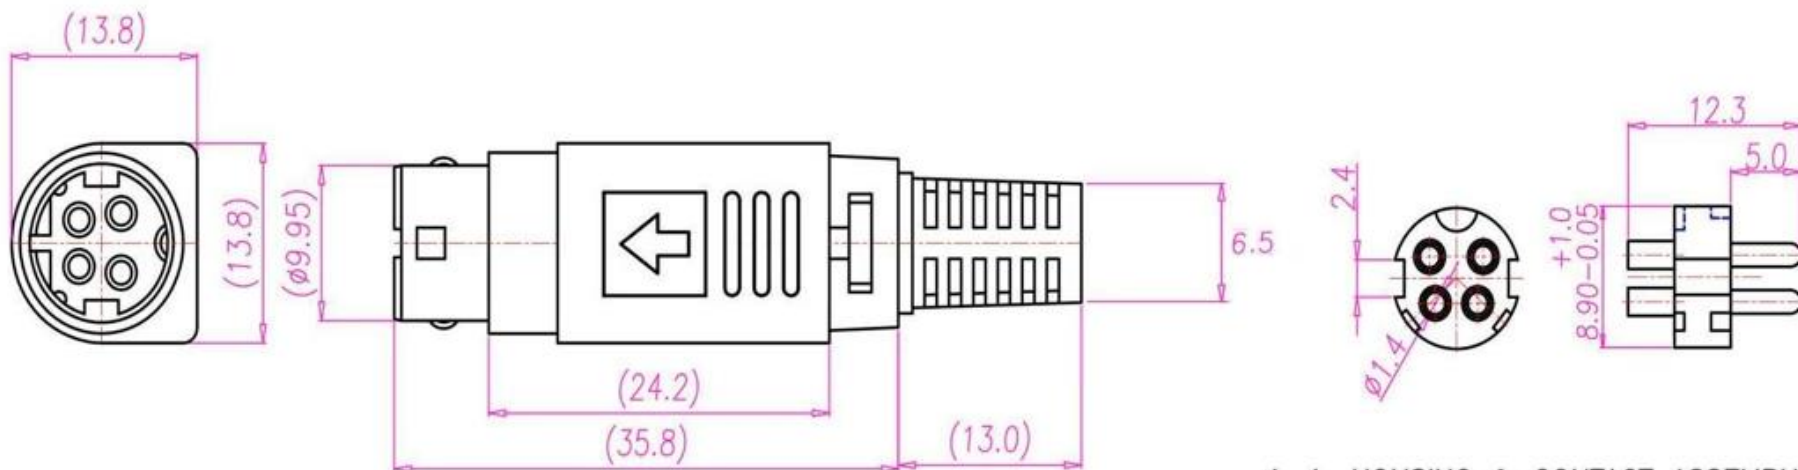

1. MATERIAL:

- 1-1. HOUSING: PBT, UL94V-0
- CONTACT: COPPER ALLOY.
- 1-2. PLASTIC COVER: ABS
- 1-3. METAL SHELL: COPPER ALLOY, NICKEL PLATED.
- 1-4. METAL CAP: COPPER ALLOY, NICKEL PLATED.
- 1-5. CABLE FIXER: COPPER ALLOY, TIN PLATED.
- 1-6. POM RING: POM
- 1-7. SPRING: STEEL, NICKEL PLATED.
- 1-8. PLASTIC TUBE: ABS
- 1-9. SR: PVC

2. FINISH:

- 2-1. CONTACT: SILVER 50u"

3. ELECTRICAL SPECIFICATION :

- 3-1. RATED CURRENT : 7.5A/DC MAX
- 3-2. RATED VOLTAGE : 20V/DC MAX

4. ENVIRONMENTAL :

- 4-1. OPERATION TEMPERATURE : -20 ℃~85℃

RoHS Compliant		Ninigi	
APPD. 核准	SCALE 比例	TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖	UNIT 單位	SIZE 紙張尺寸	POWER DIN 4PIN PLUG ASSEMBLY TYPE
DATE 制表日	PAGE 張數	REV. 版次	SINGLE-ARROW SR OD:6.5mm SILVER PLATING BLACK
2016/9/19	1 OF 1	A	COLOR ROHS
			PART NO.
			料號
			PC-MDP-402-4P