

Technical Specifications

Model	UT320T		
Language	EN, FR, DE, IT, ES, SV, PL, CZ		
LCD size	18 x 28mm		
LCD type	FSTN		
Infrared measurement	Measuring range	-40°C~300°C (-40°F~572°F)	
	Temperature	Range	Accuracy
		-40°C≤t≤0°C:	±(1.5+0.1× t)°C
		0°C<t≤300°C:	±2.0°C or ±0.02×t°C whichever is greater
		-40°F≤t≤32°F:	±(4.0+0.1× t-32)°F
		32°F<t≤572°F:	±4.0°F or ±0.02×t°F whichever is greater
	Temperature coefficient	±0.1°C/°C or ±0.1%/°C whichever is greater	
	Distance to spot ratio (D: S)	8:1	
	Emissivity	Adjustable (0.1~1.0)	
	Spectral range	5μm~14μm	
	Response time	≤500ms (95% of reading)	
	Repeatability	1.0°C or 1.0% whichever is greater (2.0°F or 1.0% whichever is greater)	
	Laser	Class 2, single laser, power<1mW, wavelength 650±20nm	
Operating time	About 30h (laser and backlight on)		
Probe measurement	Measuring range	-40°C~300°C (-40°F~572°F)	
	Accuracy	Range	Accuracy
		-40°C≤t<0°C:	±2.0°C
		0°C<t≤300°C:	±1.0°C or ±0.01×t°C whichever is greater
		-40°F≤t≤32°F:	±4.0°F
		32°F<t≤572°F:	±2.0°F or ±0.01×t°F whichever is greater
	Probe type	NTC	
Minimum measuring depth	12.7mm		
Operating time	About 180h (backlight on)		
Operating temperature	0°C~50°C (32°F~122°F)		
Storage temperature	-20°C~60°C (-4°F~140°F)		
Operating humidity	<90%Rh (non-condensing)		
Highest operating altitude	2000m		
IP rating	IP54		
Drop test	2m		
Auto power off time	10min		
Data hold	√		
Lock measurement	√		
Unit conversion (°C/°F)	√		
Max/Min/Difference	√		
Characteristic			
Product size	155 x 42 x 22.5mm		
Product weight	About 110g (with batteries)		
Battery type	2 x 1.5V AAA		



UT320T

2 in 1 Thermometer

UT320T is a thermometer that combines infrared sensor and collapsible probe. Infrared measurement is used to quickly scan the surface temperature of an object and probe measurement can accurately measure the internal temperature.

High accuracy

Adjustable emissivity

Collapsible probe

T1-T2

2m drop proof

IP54


 Collapsible probe



 High accurate infrared sensor



 Wide measuring range: -40°C~300°C




 Backlit LCD display



 Drop proof

After 2 meters drop,
it still works normally.

 Distance to spot
ratio (D: S)=8:1

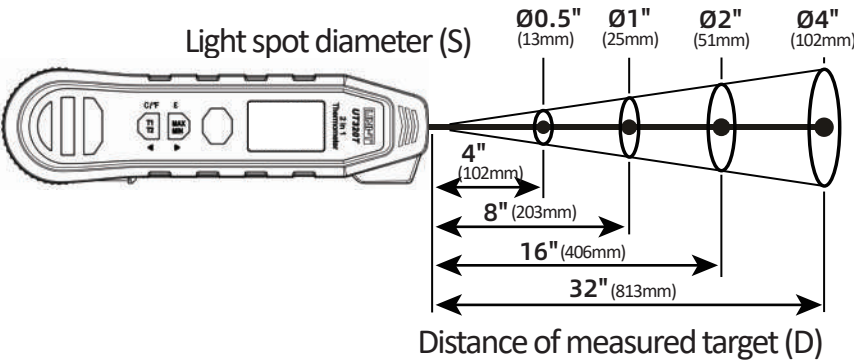

 Adjustable
emissivity
(0.1~1.0)

 T1-T2
Quickly calculates temperature
difference (T1-T2) for both IR and
probe temperatures.



 Compact structure, easy
to carry and use

Using Scenarios

