


## FLAME / SENSOR - HR0007

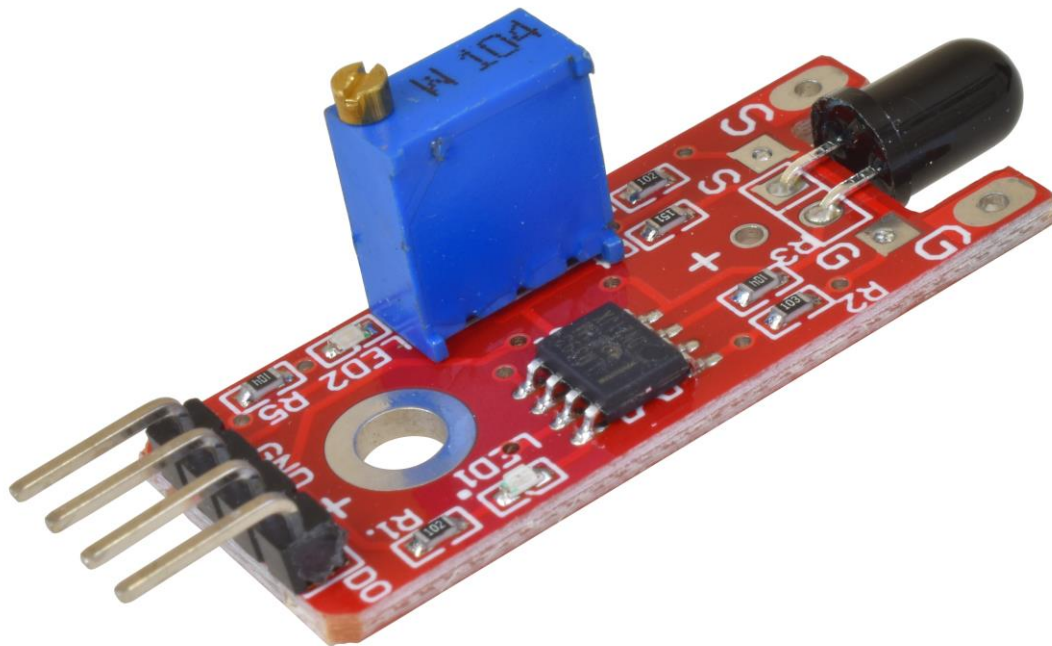

Model	KY-026
Function	High sensitivity IR receiver
Sensitivity range	760 to 1100 nm
Supply ON Indicator	Yes
Comparator Output Indicator	Yes
Outputs	
AO	Analog Voltage output from IR sensor
DO	High / Low level signal output from comparator
Comparator Threshold	Preset adjustable
Detection Angle Range	60 degrees
Operating Voltage	5 to 15 VDC
Dimensions	36 x 13 mm